



Y-Strainer

The Cash Acme Y-Strainer utilizes a wire mesh screen to actively remove small solid particles from the flow of liquids or gases.


The Cash Acme Y-Strainer may be installed horizontally or vertically in a pipeline to protect equipment such as regulators, pumps, or meters.

- Gasket composed of non-asbestos material: *Superior reliability, improved user safety.*
- Mesh screen accessed through removable cap: *Allows for simple cleaning and maintenance.*
- Strainer rated to 150 W.O.G.: *Designed to withstand high flow rates and extreme temperatures.*
- High quality, robust bronze bodies are corrosion resistant: *Specify and install with confidence!*




TYPICAL INSTALLATION

The **Cash Acme Y-Strainer** removes small solid particles from the flow of liquids or gases in a pipeline by means of a mesh screen.

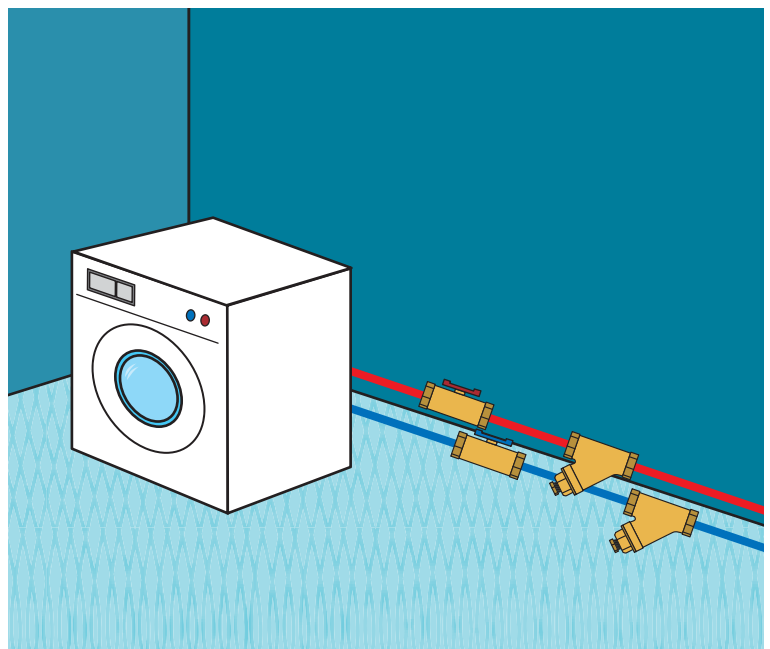



Y-Strainer

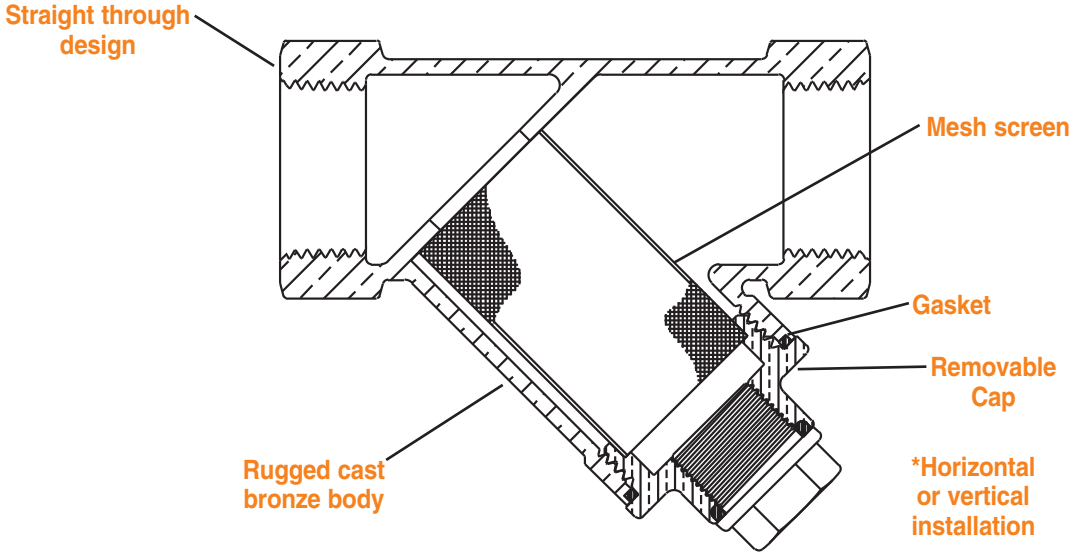

CONNECTIONS

Threaded NPT Connection. . . . 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"