

SharkBite® Water Hammer Arrestor

DESCRIPTION

The SharkBite® Water Hammer Arrestors are engineered devices that provide a maintenance free continuous protection system against detrimental destructive forces generated by the immediate cessation of water flowing in the water distribution system. The SharkBite® Water Hammer Arrestor is engineered to expressly be used with SharkBite®. The SharkBite® Water Hammer Arrestor can be installed horizontally and vertical and can be connected in seconds to copper tubing, and CTS CPVC and PEX.


FEATURES AND BENEFITS

Instant push-fit connections for increased ease-of-use:
No soldering, clamps, unions, or glue required.

Designed for vertical and horizontal installation:
Flexible installation options in new or existing plumbing systems.

Listed by ASSE:
Inspector friendly, peace of mind.

Water tight Joint:
Seal that is permanently water tight.

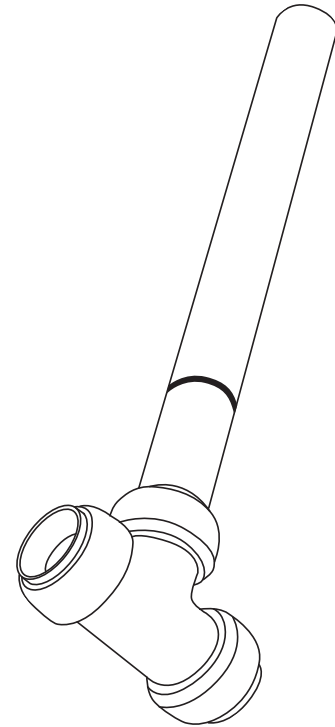

SPECIFICATION DATA

Performance:


Maximum pressure 200 psi
 Maximum temperature 200°F (93°C) (water)
 Service Water

Hammer Arrestor Materials:

Barrel Type "K" hard drawn copper
 Piston Brass
 Cap Brass
 O-rings EPDM

SharkBite® Materials:

Body DZR brass
 O-ring EPDM
 Grab ring Stainless steel
 Tube support liner. Polysulfone

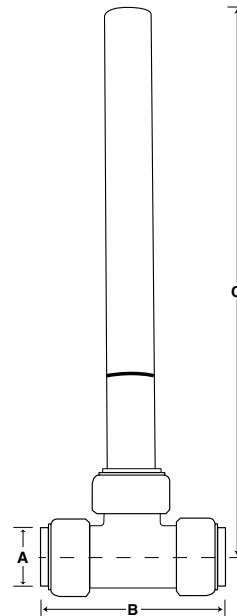

CONNECTIONS

SharkBite® 1/2", 3/4" & 1"

Cash Acme Size	Fixture Units
1/2"	1-11
3/4"	12-32
1"	33-60

Product Number	A	B	C
22630	1/2"	2.72"	6.37"
22631	1/2"	2.72"	7.37"
22632	3/4"	3.24"	9.71"
22633	1"	3.84"	9.60"