

## Cash Acme<sup>™</sup> Temporary Bypass Kits for EB45


The Cash Acme<sup>™</sup> Temporary Bypass Kits (Jumpers) are used as a temporary bypass, prior to installing an Cash Acme EB45 Pressure Regulating Valve. The temporary bypass is used to test the system for leaks and pressure loss and flush the system of trash, dirt and debris protecting the pressure reducing valve from possible damage.

The Cash Acme Temporary Bypass Kit is not certified to any standard. It is designed to be used as a temporary by pass device to test and flush the water distribution system.

## Specification Data

Performance		
Maximum Inlet pressure	400 psi	
Temperature range	33°F - 180°F (0.6°C - 82.2°C)	
Service	Potable water	

Materials			
1	Body	CPVC	
2	Face Seal	EPDM	
2	Strainer Screen	Stainless Steel	
3	Coupling Nut	Brass	
4	Tail Piece	Brass (Sweat & NPT threaded)	
5	Diaphragm	Nylon Fabric Reinforced EPDM	

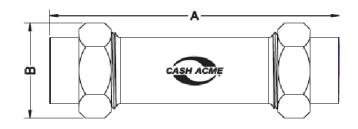

Connection Style	Α	В
Threaded (NPT)	6-11/64	2-11/64
Sweat	6-27/64	2-11/64
Threaded (NPT)	6-53/64	2-23/32
Sweat	7-3/16	2-23/32
	Threaded (NPT) Sweat Threaded (NPT)	Threaded (NPT) 6-11/64   Sweat 6-27/64   Threaded (NPT) 6-53/64

Product Submittal		
Name		
Date		
Architect/Owner		
Contractor		
Tag		
Notes		



Rev 1.1 / 01-21-22 Page 1 of 1 EN-US

