



2000 Series Ball Valves

DESCRIPTION


The Cash Acme 2000 and 2000C are high quality forged brass ball valves, manufactured to exacting standards.

All Cash Acme Ball Valves include a packing nut that may be adjusted independently of the handle lock-nut, thereby extending the life of the packing gland.

The Cash Acme Ball Valves are rated to 600 psi WOG and 150 psi WSP. Temperature rating on the 2000 and 2000C is 300°F max water temperature. They are available with threaded (2000) or sweat copper ends (2000C). Both valves meet MSS-SP-110 standard.

The Cash Acme 2010 and 2010C carry a wide variety of approvals: AGA, CGA, UL, ULC and Factory Mutual for the 2010 and UL, UL C and factory Mutual for the 2010C.

The valves are rated to 600 psi WOG and 15-psi WSP. Temperature rating on the 2010 and 2010C is 300°F max water temperature. Available with threaded (2010) or sweat copper ends (2010C). Both valves meet MSS-SP-110 standard.

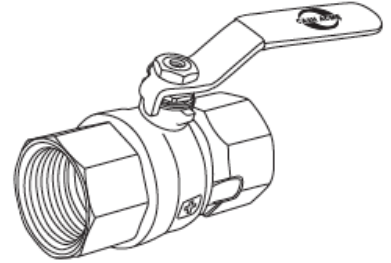

FEATURES AND BENEFITS

Convenient single lever control:



Makes them easy to use and encourages shut-off of the water supply.

Economical and easy to install:

Saves money and time!

2000 Series Ball Valves

TYPICAL INSTALLATION

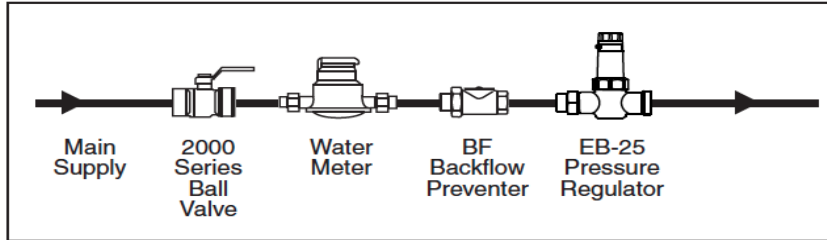

SPECIFICATION DATA

Performance:


Maximum temperature 300°F (water)
 Maximum pressure 600 psi (WOG), 150 psi (WSP)
 Service Water, oil, gas and steam

Materials:

Body Brass
 Seat Ring PTFE
 Ball Brass, chrome plated
 Body End Retainer Brass
 Stem Brass
 O-ring NBR
 Packing PTFE
 Packing Nut Brass
 Handle Nut Zinc plated steel
 Handle Zinc plated steel

THREADED (NPT) ENDS

Size	A	B
1/4"	1-13/16"	1/4"
3/8"	1-13/16"	3/8"
1/2"	2"	1/2"
3/4"	2-3/8"	3/4"
1"	3"	1"
1-1/4"	3-5/16"	1-1/4"
1-1/2"	3-5/8"	1-1/2"
2"	4-5/16"	2"



SWEAT COPPER ENDS

Size	A	B
1/2"	1-15/16"	1/2"
3/4"	5-1/2"	3-3/4"
1"	3-5/16"	1"

CONNECTIONS

Threaded (NPT) 1/4" through 2"
 Sweat Copper 1/2" through 1"