

Cash Acme™

CQ-M Boiler Dual Control Valve

The CQ-M Boiler Dual Control Valve is constructed of a bronze body and features large unrestricted waterways, special heat resistant composition diaphragms, silicone relief seat and an easy to clean inbuilt stainless steel strainer. All units have a test lever and an inbuilt check valve to prevent backflow. Provides pressure control and protection from thermal expansion.

Note: The relief section of all Cash Acme Dual Controls is for thermal expansion ONLY. For proper pressure relief protection, the boiler must also be provided with a properly sized ASME-rated relief valve.

Approved Applications

Intended for use with continuous or intermittent applications on water supply lines.


Specification Data

Performance

Factory Set	2 psi
Outlet Pressure Range	2-30 psi
Maximum Temperature	180°F (82°C)
Maximum Inlet Pressure	100 psi
Service	Water

Materials

Body	Leaded Semi-Red Brass
Strainer	Stainless Steel
Springs	Steel
Seat Disc	Buna-N
Diaphragm	Buna-N/Nylon

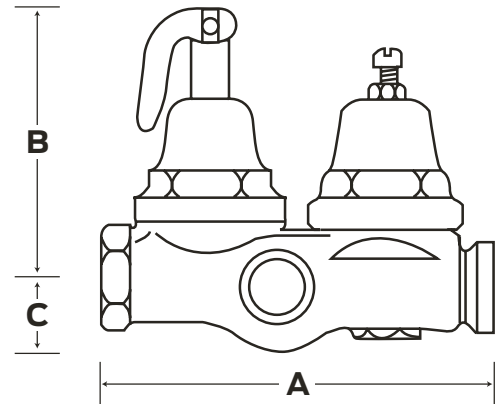

Dimensions (inches)

Size	Connection Style	Part #	A	B	C
1/2"	Threaded NPT	07045-0002	6-7/16	4-1/8	1

Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	