

# Cash Acme™ CR Boiler Dual Control Valve

The Cash Acme™ CR Boiler Dual Control Valve for hot water space heating is designed for a variety of installations. It is suitable for one, two or three story buildings without adjustment. The Cash Acme CR Dual Control Valve features a balanced piston for closer outlet pressure control regardless of variations in inlet pressure and a rapid fill feature with an improved larger seat for higher capacities and quicker fill.

## Approved Applications

Designed for hot water space heating installations, the CR Series valve is suitable for 1 to 3 story buildings without adjustment.


## Specification Data

### Performance

Factory Set	2 psi
Maximum Temperature	180°F
Maximum Inlet Pressure	100 psi
Service	Water

### Materials

Body	Iron
Strainers	Brass
Springs	Stainless Steel
O-Rings	EPDM
Diaphragm	Nylon Reinforced EPDM

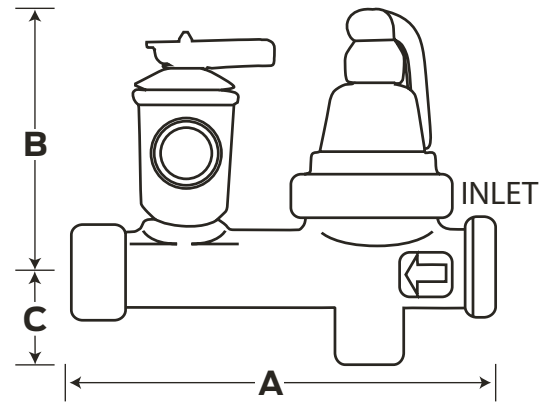

### Dimensions (inches)

Size	Connection Style	Part #	A	B	C
1/2"	Threaded NPT	18394-0002	6-3/16	3-25/32	1-7/16
1/2"	Sweat	18398-0002	6-13/16	3-25/32	1-7/16

### Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	