


Cash Acme™ Temporary Bypass Kits for EB45

The Cash Acme™ Temporary Bypass Kits (Jumpers) are used as a temporary bypass, prior to installing an Cash Acme EB45 Pressure Regulating Valve. The temporary bypass is used to test the system for leaks and pressure loss and flush the system of trash, dirt and debris protecting the pressure reducing valve from possible damage.

The Cash Acme Temporary Bypass Kit is not certified to any standard. It is designed to be used as a temporary by pass device to test and flush the water distribution system.

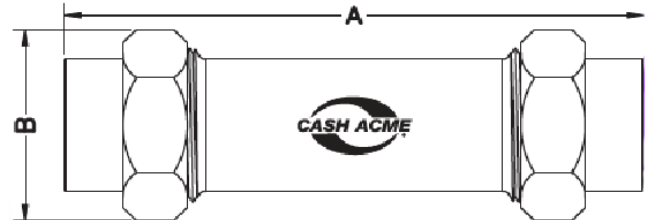

Specification Data

Performance

Maximum Inlet pressure	400 psi
Temperature range	33°F - 180°F (0.6°C - 82.2°C)
Service	Potable water

Materials

1	Body	CPVC
2	Face Seal	EPDM
	Strainer Screen	Stainless Steel
3	Coupling Nut	Brass
4	Tail Piece	Brass (Sweat & NPT threaded)
5	Diaphragm	Nylon Fabric Reinforced EPDM

Dimensions (inches)

Size	Connection Style	A	B
1"	Threaded (NPT)	6-11/64	2-11/64
	Sweat	6-27/64	2-11/64
1-1/4"	Threaded (NPT)	6-53/64	2-23/32
	Sweat	7-3/16	2-23/32

Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	